

SmartFridge[™] and GuestFridge






SmartFridge

The intelligent fridge that cools only when your guests need it!

SmartFridge, an innovative new product from Minibar Systems, redefines hotel in-room convenience refrigeration technology with benefits for both guests and hotels. The control panel lets guests use the fridge when needed and can be shutdown when not needed, saving up to 50% of specified energy consumption.

Hotels are now able to offer guests the amenity they ask for and benefit from our fundamental commitment to develop sustainable products.

- LED guest convenience control panel
- Saves up to 50% in energy consumption
- Self-executing diagnostic tests
- Quiet compressor technology

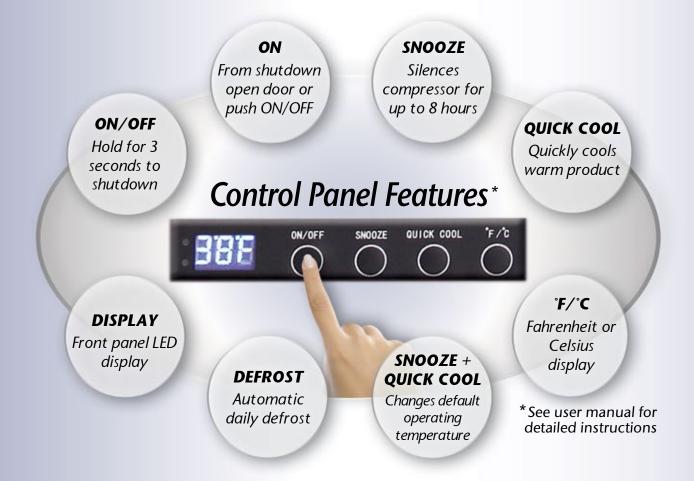

SmartFridge Models

Door Options(Available for both SmartFridge and GuestFridge Models)



Black Metal Glass Door

SmartFridge 50 **Control Panel On Top**

Dimensions $H \times W \times D$ (in)

21 x 17 x 20

Shelves / Door Racks	212
Watts (W)	85
Voltage (V)	110/220
Volume (cu. ft. / liters)	1.62 / 46
Energy Consumption**	0.31 - 0.62 kWh/24 hr**
Net Weight (lbs / kg) With Optional Glass Door	35 / 15.9 36.4 / 16.5
Internal LED Light	Yes
Certification	c-ETL-us, CE

^{*} No door racks available on glass doors



SmartFridge 65 Control Panel On Top

Dimensions $H \times W \times D$ (in)

Shelves / Door Racks	2/2
Watts (W)	85
Voltage (V)	110/220
Volume (cu. ft. / liters)	2.19/62
Energy Consumption**	0.27 - 0.53 kWh/24 hr**
Net Weight (lbs / kg) With Optional Glass Door	40.8 / 18.5 48.5 / 22
Internal LED Light	Yes
Certification	c-ETL-us, CE

^{*} No door racks available on glass doors

SmartFridge 50
Full Glass Door
Control Panel On Top

	21 x 17 x 20.75 534 x 432 x 527
--	------------------------------------

117. 11 7. D (11111)	
Door Option*	Full Glass Door*
Door Hinge	Reversible
Shelves / Door Racks	2 (Aluminium) / 0
Body Color	Gray
Watts (W)	85
Voltage (V)	110/220
Volume (cu. ft. / liters)	1.62 / 46
Energy Consumption**	0.31 - 0.62 kWh/24 hr**
Net Weight (lbs / kg)	35 / 15.9
Internal LED Light	Yes
Certification	c-ETL-us, CE
Other: Display will turn off a	after 10 seconds of non use


^{*} No door racks available on glass doors

GuestFridge

GuestFridge Models



GuestFridge 65 Convenience Fridge	
No Control Panel Dimensions H x W x D (in) H x W x D (mm)	25.5 x 17 x 20.25 648 x 432 x 515
oo O tion.*	blid Fack Door (standard) air Less Steel Glass Door* Black Frame Glass Door*
Door Ling Sev s Doc R cks	Renersible 2 /
Watts (W)	85
Voltage (V)	110/220
Volume (cu. ft. / liters)	2.19 / 62
Energy Consumption	0.53 kWh/24 hr
Net Weight (lbs / kg) With Optional Glass Door	40.8 / 18.5 48.5 / 22
Internal LED Light	No
Certification	c-ETL-us, CE
* No door racks available o	n glass doors



Ventilation requirements for built-in fridges:

A channel for air circulation is imperative for ventilation and operation. A minimum open area of 31 in² (200 cm²) is required for proper ventilation. Please refer to the Minibar Case Good Specifications manual for all details. Inadequate ventilation will void warranty.

Average energy consumption per 24 hours at 77° F (25° C). Energy consumption reduced up to 50% with **ON/OFF shutdown feature on SmartFridge control panel.

***Our production plant is ISO 9001 certified.

‡Specifications may change without notice due to continuous product development.



Minibar North America

7340 Westmore Road Rockville, MD 20850 tel 301 354 5055 fax 301 309 1115 info@minibarNA.com